


WireGlide®

Wireline Lubricant



Formulated with XPL+ Technology, ProOne **WireGlide** bonds to metal and has a high load carrying capability (over 200,000psi of pressure) extending wire rope life. It penetrates to the core and reduces friction between individual strands which also insulates wire from EMF, and gives signal and tool protection.

It is ultimately the most superior lubrication technology of its kind able to withstand extreme low and high temperatures. It is resistant against abrasive elements, corrosion/oxidation and helps prevent breakage.

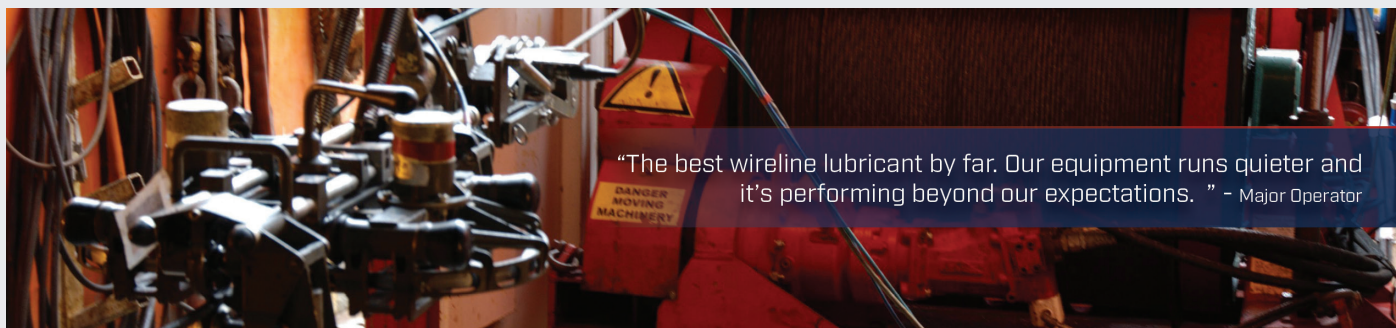

ADVANTAGES:

- Penetrates and bonds to the wire core
- Heavy load carrying capability
- Extreme high temperature range beyond 500°F
- Extreme low temperature range -40°F
- Water resistant/ displaces moisture
- Superior oxidation and corrosion resistance
- Non-Conductive

TREATMENT:

- Use as needed

BENEFITS OF USE:

- Unparalleled protection against seizure and breakage
- Exceptional pumpability
- Maximize equipment life
- Reduces power consumption
- Earth friendly

ProOne#	Size	Case Pack
52035	35 lb./15.9 kg Pail	1
52120	120 lb./54.4 kg Keg	1
52400	400 lb. drum/181.kg	1